



# Four wings door 2P71

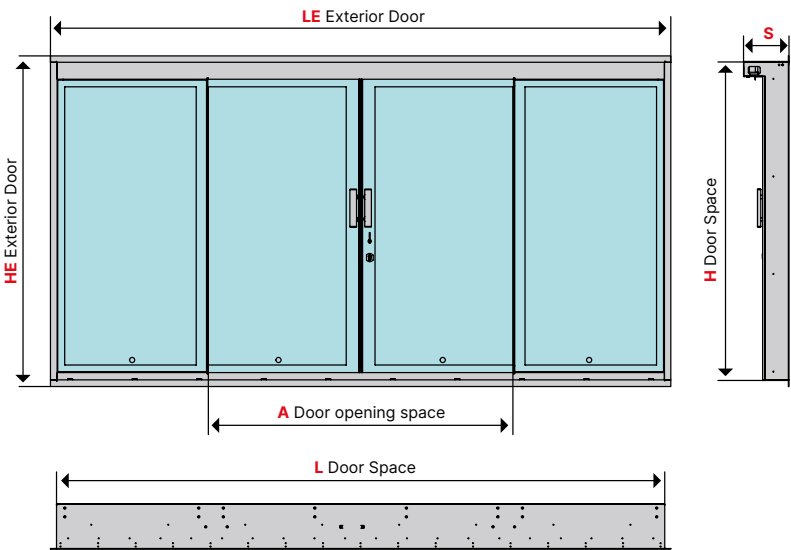

model	A (mm/inch)	L (mm/inch)	Le (mm/inch)	H (mm/inch)	He (mm/inch)	S (mm/inch)	glass (mm/inch)	handle standard	weather proof ISO 12216:2004
2P71/23	1630 64 <sup>1</sup> / <sub>10</sub>	3695 145 <sup>1</sup> / <sub>2</sub>	3770 148 <sup>2</sup> / <sub>5</sub>	1935 76 <sup>1</sup> / <sub>5</sub>	2010 79 <sup>1</sup> / <sub>10</sub>	275 10 <sup>4</sup> / <sub>5</sub>	6 1 <sup>1</sup> / <sub>5</sub> "	mod.7550	CAT 3
2P71/26	1400 55 <sup>1</sup> / <sub>10</sub>	3275 128 <sup>9</sup> / <sub>10</sub>	--	2095 82 <sup>1</sup> / <sub>2</sub>	--	180 7"	6 1 <sup>1</sup> / <sub>5</sub> "	mod.7550	CAT 3

Two central sliding wings with opposite opening.  
The doors are subject to quality control tests to comply with ISO 12216.2004 standards.

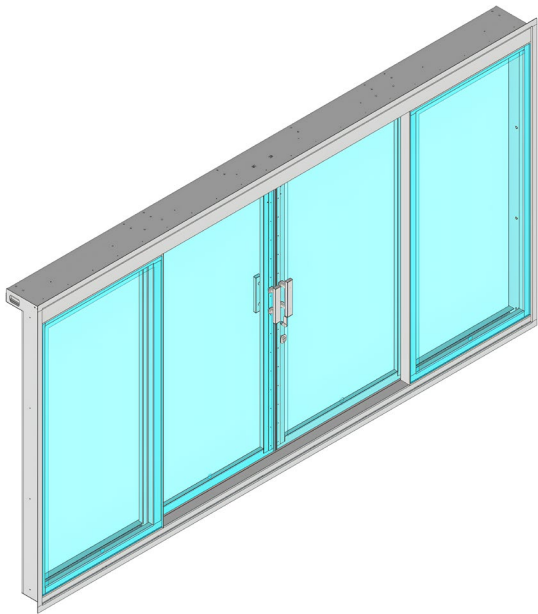