


TELESCOPIC CRANES model 3037

loading capacity 500 Kg

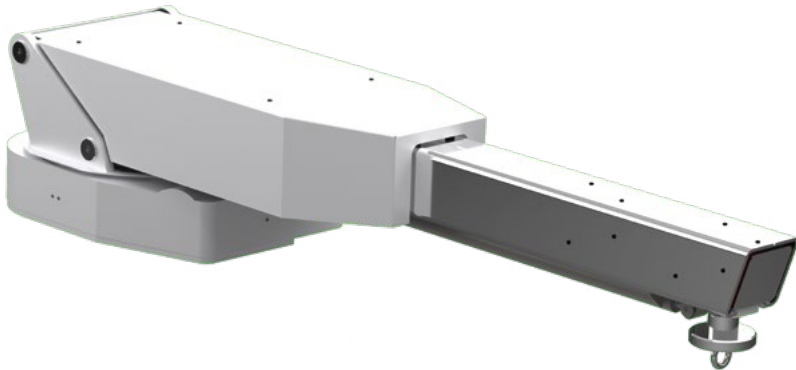

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	F (mm/ inch)	G (mm/ inch)	H (mm/ inch)	I (mm/ inch)	L (mm/ inch)	N (mm/ inch)	α	Cable length (mm/inch)	Capacity standard (kg/lbs)	Weight (kg/lbs)
3037/32	1770 69 ³ / ₁₆	3540 139 ³ / ₈	3230 127 ¹ / ₂	1455 57 ¹ / ₄	925 36 ³ / ₈	1800 70 ⁷ / ₈	2925 115 ¹ / ₂	455 17 ⁷ / ₈	570 22 ³ / ₈	1115 43 ³ / ₈	120 4 ³ / ₄	50°	6700 263 ³ / ₄	500/1100	460/1010

Telescopic flybridge crane with 2 sections, fitted inside a box.

Made of AISI 316L stainless steel, painted white.

Lifting arm moved by hydraulic rams.

1 telescopic elements made of polished AISI 316L stainless steel.

Fitted with a hydraulic hoist with a textile cable integrated with the telescopic element.

Built-in rotation actuator from 0° to 359° fitted in the base.

Possibility of product certification.

