


TELESCOPIC CRANES model 3046

loading capacity 250 Kg to 350 Kg

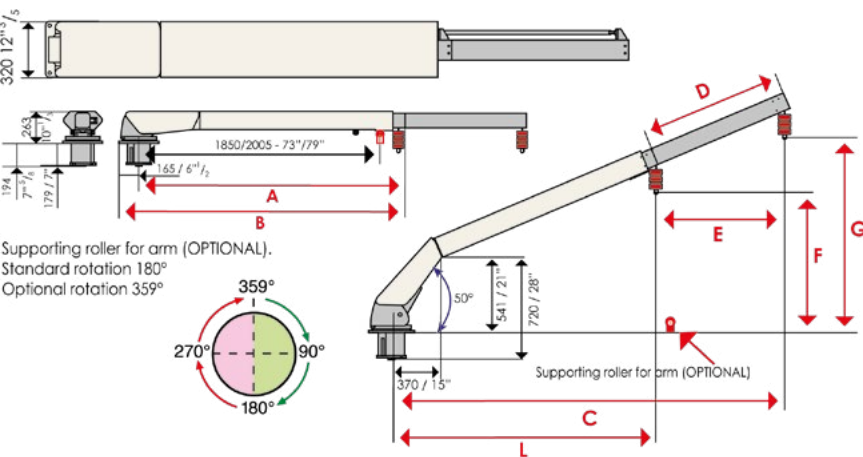

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	F (mm/ inch)	G (mm/ inch)	L (mm/ inch)	Cable length (mm/inch)	Capacity standard (kg/lbs)	Capacity optional (kg/lbs)	Weight (kg/lbs)
3046/28	2060 81"	2210 87"	2665 105"	930 36" 3/8"	860 34"	930 37"	1300 51"	1800 71"	4400 173" 3500 138"	250/550	350/800	290/640
3046/32	2160 85"	2360 93"	2830 111" 1/2"	1030 40"	930 37"	1007 39"	1402 55"	1900 75"	5700 224" 4500 177"	250/550	350/800	314/690

Supporting roller for arm (OPTIONAL).
Standard rotation 180°.
Optional rotation 359°.

Possibility of product certification.

LEAD TIME TO BE CONFIRMED

