

TELESCOPIC CRANES model 3051

loading capacity 300 to 500 Kg




model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	F (mm/ inch)	G (mm/ inch)	L (mm/ inch)	Cable length (mm/inch)	Capacity standard (kg/lbs)	Capacity optional (kg/lbs)	Weight (kg/lbs)
3051/31	1930 76"	2140 84"	3090 122"	1160 46"	950 37"	950 37" 1/2	1615 63" 3/8	1830 72"	5700 244" 4600 181"	300/700	500/1100	291/640
3051/35.0 3051/35.1	2130 84"	2355 93"	3410 134"	1280 50"	1030 40"	1000 39"	1760 69"	1910 75"	6700 264" 5400 213"	300/700	500/1100	314/690 302/670
3051/45	2620 103"	2850 112"	4350 171"	1730 68" 1/4	1415 55" 3/8	1290 50" 3/4	2310 91"	2320 91" 1/8	5400 213"	500/1100	- -	353/780

Standard automatic rotation 90° clockwise, by means of a cylinder.
Optional rotation 180/359°, by means of an actuator.

* Without hydraulic hoist.

The drawing shows the version with built-in actuator (OPTIONAL).

Possibility of product certification.

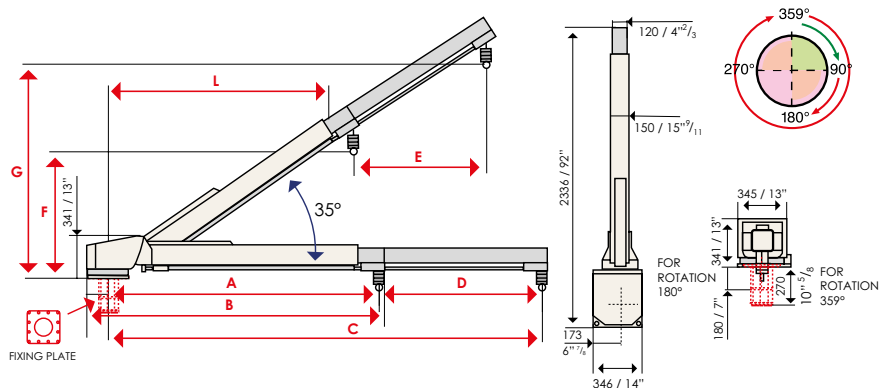

Actuator optional version