


TELESCOPIC CRANES model 3054/55

loading capacity 250 Kg to 350 Kg

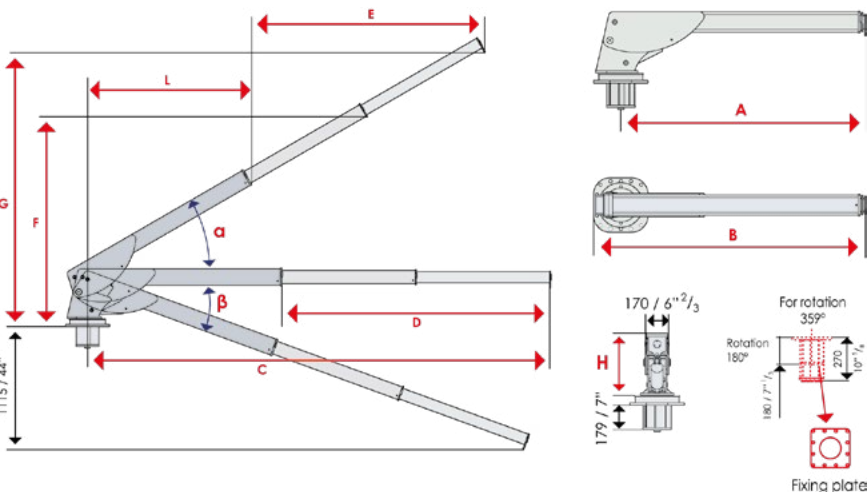

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	F (mm/ inch)	G (mm/ inch)	H (mm/ inch)	L (mm/ inch)	α	β	Cable length (mm/inch)	Capacity standard (kg/lbs)	Weight (kg/lbs)
3055/42	1810 71"	2010 79"	4205 166"	2420 95"	2125 84"	1905 75"	2485 98"	530 21" 580 23"	--	30°	20°	--	250/550 350/800	193/425 212/465
3054/20 FIXED ARM	2000 71"	2210 87"	2000 79"	--	--	--	2050 80 7/16"	455 18"	1210 47 3/8"	25°	0°	5400 213"	300/700	268/590
3054/34	1300 51"	1505 59 1/4"	3190 126"	1900 75"	1170 46"	1400 55"	2940 116"	455 18"	730 28 3/4"	25°	0°	--	300/700	300/660

Model 3054:

- Standard automatic rotation 90° clockwise, by means of a cylinder.
 - Optional rotation 90° counter clockwise, by means of a cylinder.
 - Optional rotation 180°/359°, by means of an actuator.
- The drawing shows the version with built-in actuator (OPTIONAL).

Model 3055:

- Rotation 359° by means of an actuator.

Possibility of product certification.

LEAD TIME TO BE CONFIRMED

