


TELESCOPIC CRANES model 3080/85/87

loading capacity 1000 Kg to 2500 Kg

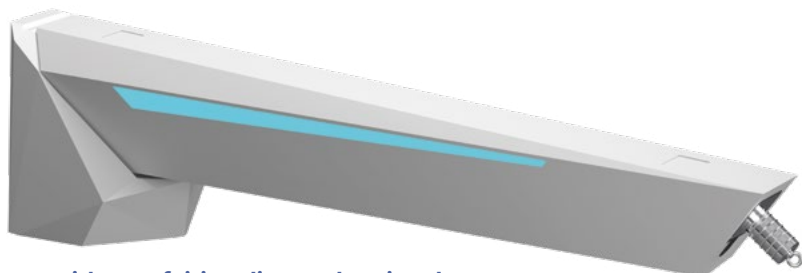

*Crane with new fairing diamond optional

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	F (mm/ inch)	G (mm/ inch)	H (mm/ inch)	I (mm/ inch)	L (mm/ inch)	N (mm/ inch)	α	Cable length (mm/inch)	Capacity standard (kg/lbs)	Capacity optional (kg/lbs)	Weight (kg/lbs)
3080/45	2990 118"	3380 133"	4170 164"	1220 48"	610 24"	3170 125"	4230 167"	750 29 1/2"	800 31 1/2"	1390 55"	200 8"	60°	7200 283"	1000/2200	1200/2650	815/1800
3080/50	3500 138"	3900 154"	5000 197"	1500 59"	770 30"	3710 146"	5150 203"	750 29 1/2"	800 31 1/2"	1730 68"	200 8"	60°	8000 315"	1000/2200	1200/2650	893/1900
3080/55	3650 143 3/4"	4060 159 3/4"	5500 216 1/2"	1870 73 3/4"	890 35"	3800 149 3/4"	5470 215 1/2"	750 29 1/2"	800 31 1/2"	1760 69 1/2"	200 8"	60°	8000 315"	1000/2200	--	793/1748
3080/60	3730 147"	4100 161"	5930 233"	2200 86"	1100 43"	3530 139"	5440 214"	750 29 1/2"	800 31 1/2"	1860 73"	200 8"	60°	8000 315"	1000/2200	--	947/2090
3080/65	4170 164 3/4"	4540 178 3/4"	6470 254 3/4"	2300 91"	1115 43 3/8"	4275 168"	6260 246 1/2"	750 29 1/2"	800 31 1/2"	2030 80"	200 8"	60°	8000 315"	1000/2200	--	983/2200
3085/50	3500 138"	3940 155"	5000 197"	1500 59"	750 30"	3655 144"	4960 195"	950 37 3/4"	--	1800 71"	240 9 3/4"	60°	8000 315"	1500/3300	1700/3700	1150/2530
3085/60	4140 163"	4570 180"	5940 234"	1800 71"	900 35"	4400 173"	5960 235"	950 37 3/4"	--	2110 83"	240 9 3/4"	60°	8000 315"	1500/3300	1700/3700	1198/2640
3085/65	4140 163"	4570 180"	6440 254"	2300 91"	1150 45"	4400 173"	6400 252"	950 37 3/4"	--	2110 83"	240 9 3/4"	60°	8000 315"	1500/3300	--	1227/2700
3087C60	4600 181"	5430 214"	6600 260"	2000 79"	1000 39"	4500 177"	6200 244"	1152 45 1/2"	--	2670 105"	344 13 1/2"	60°	9600 378"	1000/2205	--	2900/6390
3087/60	4330 170 1/2"	4850 191"	6080 239 3/4"	1750 69"	875 34"	4110 161 1/4"	5610 220 1/4"	1030 40 1/2"	--	2310 91"	330 13"	60°	7200 283"	2000/4400	2500/5500	2150/4740
3087/65	4860 191"	5350 211"	6860 270"	2000 79"	1000 39"	4595 181"	6330 249"	1030 40 1/2"	--	2565 101"	330 13"	60°	8000 315"	2000/4400	2500/5500	2320/5100

This crane can be certified for rescue boats and can be produced in compliance with S.O.L.A.S. requirements, upon request.

ATTENTION! In case of certification request, dimensions and technical specifications may undergo significant variations.

Please contact our Technical Department for information about the available certifications for the different crane models.

Standard rotation 359°.

N.B. For this model, the optional configuration with fixed base and rotating turret is also available (see model 3076 - 3083).

Please get in touch with our Technical Department.

*Model 3080-3085-3087 with new fairing diamond (optional).

These cranes can be certified by
RINA SERVICE, BUREAU VERITAS, LLOYD REGISTER.

LEAD TIME TO BE CONFIRMED

