

# CRANES model with fixed arm 3082/86/88

## loading capacity 1000 Kg to 3500 Kg



model	A (mm/ inch)	B (mm/ inch)	F (mm/ inch)	H (mm/ inch)	I (mm/ inch)	L (mm/ inch)	N (mm/ inch)	$\alpha$	Cable length (mm/inch)	Capacity standard (kg/lbs)	Capacity optional (kg/lbs)	Weight (kg/lbs)
3082/35	3515 138"	3855 151"	3675 144"	722 30"	--	2000 79"	160 6"	56°	8000 315"	1000/2200	1500/3300	610/1350
3086C55	5800 228"	6150 242"	5700 224"	978 38 1/2"	670 26 3/4"	2750 108"	260 10 1/4"	60°	10000 394"	1000/2205	--	1320/2910
3086/45	4465 176"	4910 193"	4700 185"	955 37 3/4"	670 26 3/4"	2280 90"	260 10 1/4"	60°	7200 284"	2200/4850	--	1210/2670
3086/50	4960 195"	5410 213"	5100 201"	955 37 3/4"	670 26 3/4"	2530 99"	200 8"	60°	7200 283"	2200/4850	--	1330/2930
3088/45	4500 177"	5230 206"	3890 153"	1020 40"	840 33"	2280 90"	330 13"	60°	7200 284"	3500/7700	--	2370/5200

This crane can be certified for rescue boats and can be produced in compliance with S.O.L.A.S. requirements, upon request. ATTENTION! In case of certification request, dimensions and technical specifications may undergo significant variations.

Please contact our Technical Department for information about the available certifications for the different crane models.

Standard rotation 359°


**N.B.** For this davit model, the optional configuration with fixed base and rotating turret is also available (see model 3076 and 3083). Please get in touch with our Technical Department.

Model 3088 cable guide system with rollers, which allows lifting also when the crane is inclined.

**\*New fairing diamond optional.**

These cranes can be certified by RINA SERVICE, BUREAU VERITAS, LLOYD REGISTER.

LEAD TIME TO BE CONFIRMED

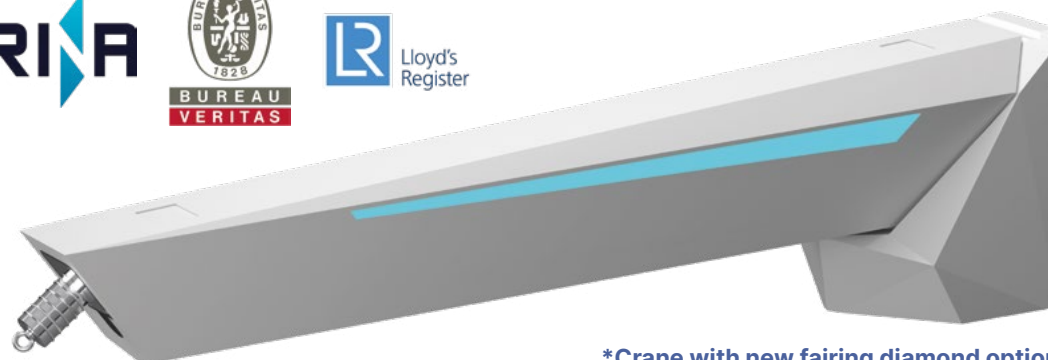

**\*Crane with new fairing diamond optional**

