

# TELESCOPIC CRANES model 3091/92/93

## loading capacity 300 Kg to 800 Kg



| model   | A<br>(mm/<br>inch) | B<br>(mm/<br>inch) | C<br>(mm/<br>inch) | D<br>(mm/<br>inch) | E<br>(mm/<br>inch) | F<br>(mm/<br>inch) | G<br>(mm/<br>inch) | H<br>(mm/<br>inch) | I<br>(mm/<br>inch) | L<br>(mm/<br>inch) | N<br>(mm/<br>inch) | $\alpha$ | Cable<br>length<br>(mm/inch) | Capacity<br>standard<br>(kg/lbs) | Capacity<br>optional<br>(kg/lbs) | Weight<br>(kg/lbs) |
|---------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------|------------------------------|----------------------------------|----------------------------------|--------------------|
| 3091/26 | 1650<br>65"        | 1900<br>75"        | 2600<br>102"       | 950<br>37"         | 475<br>19"         | 1650<br>65"        | 2480<br>98"        | 605<br>23 3/4"     | --                 | 845<br>33 3/4"     | 128<br>5"          | 60°      | 3600<br>142"                 | 300/660                          | --                               | 505/1100           |
| 3091/29 | 1800<br>71"        | 2050<br>81"        | 2900<br>114"       | 1100<br>43"        | 550<br>22"         | 1800<br>71"        | 2750<br>108"       | 605<br>23 3/4"     | --                 | 932<br>36 3/4"     | 128<br>5"          | 60°      | 4400<br>173"                 | 300/660                          | --                               | 580/1280           |
| 3091/33 | 2000<br>79"        | 2250<br>89"        | 3300<br>130"       | 1300<br>51"        | 650<br>26"         | 1960<br>77"        | 3100<br>122"       | 605<br>23 3/4"     | --                 | 1020<br>40 1/2"    | 128<br>5"          | 60°      | 5200<br>205"                 | 300/660                          | --                               | 635/1400           |
| 3091/37 | 2200<br>87"        | 2450<br>97"        | 3700<br>146"       | 1500<br>59"        | 750<br>30"         | 2130<br>84"        | 3430<br>135"       | 605<br>23 3/4"     | --                 | 1115<br>43 3/4"    | 128<br>5"          | 60°      | 6000<br>236"                 | 300/660                          | --                               | 665/1470           |
| 3092/26 | 1920<br>76"        | 2190<br>86"        | 2600<br>102"       | 680<br>27"         | 350<br>14"         | 1850<br>73"        | 2460<br>97"        | 715<br>28"         | --                 | 955<br>37 3/4"     | 160<br>6"          | 60°      | 4550<br>180"                 | 500/1100                         | --                               | 590/1300           |
| 3092/29 | 2050<br>81"        | 2320<br>91"        | 2900<br>114"       | 850<br>33"         | 425<br>17"         | 1980<br>78"        | 2720<br>107"       | 715<br>28"         | --                 | 1030<br>40 1/2"    | 160<br>6"          | 60°      | 5350<br>210"                 | 500/1100                         | --                               | 660/1450           |
| 3092/33 | 2250<br>89"        | 2520<br>99"        | 3300<br>130"       | 1050<br>41"        | 525<br>21"         | 2250<br>89"        | 3070<br>121"       | 715<br>28"         | --                 | 1130<br>44 1/2"    | 160<br>6"          | 60°      | 6150<br>240"                 | 500/1100                         | --                               | 720/1600           |
| 3092/37 | 2450<br>96"        | 2720<br>107"       | 3700<br>146"       | 1250<br>49"        | 625<br>25"         | 2320<br>91"        | 3410<br>134"       | 715<br>28"         | --                 | 1230<br>48 3/4"    | 160<br>6"          | 60°      | 6150<br>240"                 | 500/1100                         | --                               | 800/1750           |
| 3092/43 | 2750<br>108"       | 3020<br>119"       | 4300<br>169"       | 1550<br>61"        | 775<br>30"         | 2580<br>102"       | 3930<br>154"       | 715<br>28"         | --                 | 1380<br>54 1/2"    | 160<br>6"          | 60°      | 7600<br>299"                 | 500/1100                         | --                               | 950/2100           |
| 3093/30 | 1750<br>69"        | 2000<br>79"        | 2750<br>108"       | 1000<br>39"        | 500<br>20"         | 1560<br>61"        | 2520<br>99"        | 715<br>28"         | 600<br>23 3/4"     | 870<br>34"         | 200<br>8"          | 60°      | 4000<br>158"                 | 800/1770                         | --                               | 552/1217           |
| 3093/40 | 2545<br>100 1/2"   | 2920<br>115"       | 3945<br>155 1/2"   | 1400<br>55"        | 700<br>27 1/2"     | 2350<br>92 1/2"    | 3560<br>140"       | 715<br>28"         | 600<br>23 3/4"     | 1300<br>51 1/2"    | 200<br>8"          | 60°      | 7200<br>283 1/2"             | 800/1770                         | --                               | 585/1290           |

This crane can be certified for rescue boats and can be produced in compliance with S.O.L.A.S. requirements, upon request.

ATTENTION! In case of certification request, dimensions and technical specifications may undergo significant variations.



Please contact our Technical Department for information about the available certifications for the different crane models.

Standard rotation 359°.

**\*New fairing diamond optional.**

These cranes can be certified by RINA SERVICE, BUREAU VERITAS, LLOYD REGISTER.

LEAD TIME TO BE CONFIRMED

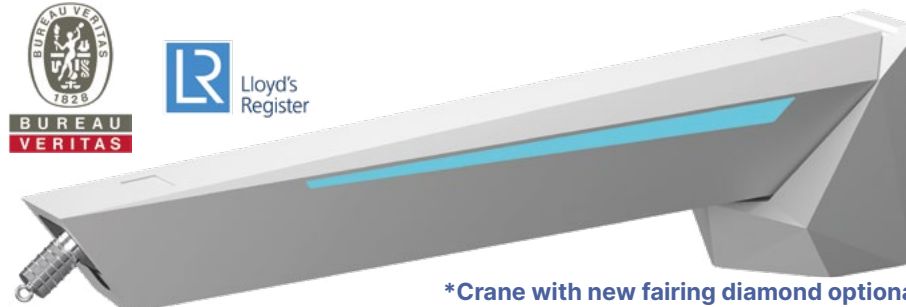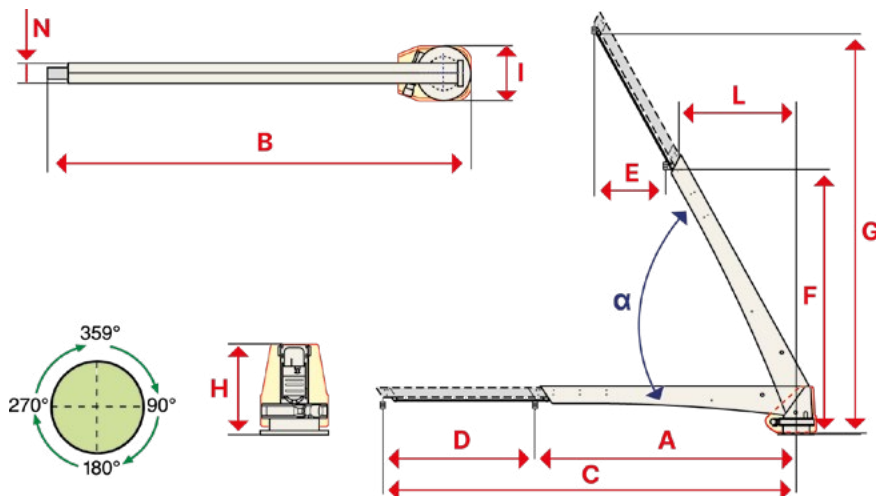

**\*Crane with new fairing diamond optional**