


ROTATING CEILING CRANES model 3153

loading capacity 500 Kg

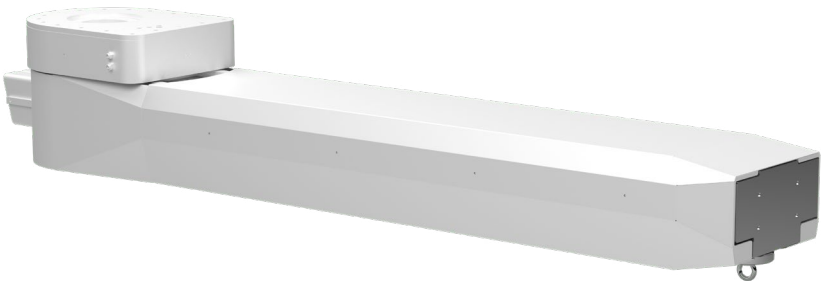

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	F (mm/ inch)	G (mm/ inch)	H (mm/ inch)	L (mm/ inch)	Cable length (mm/inch)	Capacity standard (kg/lbs)	Weight (kg/lbs)
3153/40	1795 70 ³ / ₈	2074 81 ³ / ₈	3857 151 ⁴ / ₈	1937 76 ³ / ₄	1091 43"	1108 43 ³ / ₈	4135 162 ¹ / ₂	325 12 ³ / ₈	373 14 ³ / ₈	3600 142"	500/1100	443/980
3153/50	2187 86 ¹ / ₄	2478 97 ¹ / ₂	4987 196 ¹ / ₈	2278 89 ⁷ / ₈	1296 51"	1507 59 ¹ / ₈	5278 207 ³ / ₈	415 16 ¹ / ₈	434 17"	4000 157"	500/1100	640/1410

Ceiling crane composed of 3 elements: one main element made of AISI 316L painted white stainless steel and two telescopic elements made of polished AISI 316 stainless steel.
 180° standard rotation by means of an actuator.
 360° optional rotation by means of an actuator.
 Possibility of product certification.

