
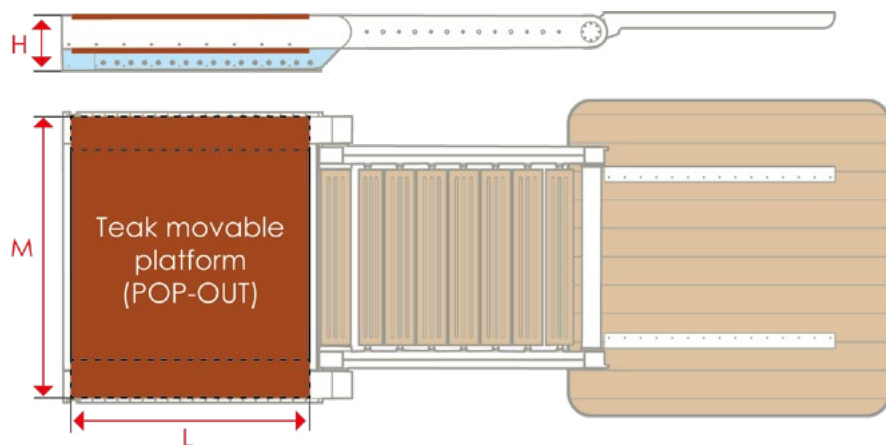


POP-OUT model 3371/72/73/74/75/76 and 3741/62

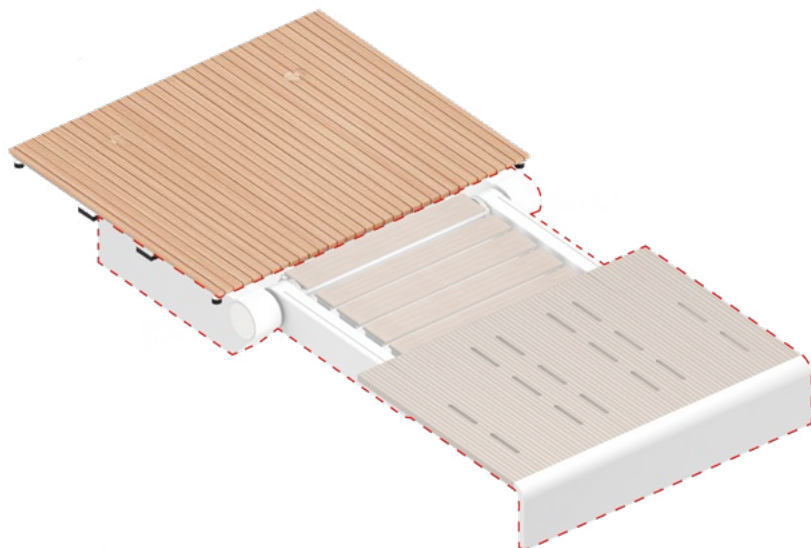

model pop out	Transformer	N° steps	L (mm/inch)	M (mm/inch)	H (mm/inch)	weight pop out (kg/lbs)	weight pop out + transformer (kg/lbs)
3741.30C1	3341/30.CC1	3	685 27"	985 38" ¹ / ₂	400 15" ³ / ₄	60/130	340/750
3762/40C1	3362/40.CC1	4	1129 44" ³ / ₂	1105 43" ¹ / ₂	460 18"	90/200	660/1455
3762L40C1	3362L40.CC1	4	1129 44" ³ / ₂	1505 59" ¹ / ₄	420 16" ¹ / ₂	105/233	720/1585
3762/50C1	3362/50.CC1	5	1440 56" ⁷ / ₁₀	985 38" ³ / ₄	430 15" ⁹ / ₁₀ Reg +/- 10 ² / ₅ "	95/210	705/1550
3371.40C1	3381.40.CC1	4	940 37"	1805 71"	370 14" ³ / ₅ Reg +/- 10 ² / ₅ "	110/240	620/1360
3372.40C1	3382.40.CC	4	940 37"	1840 72" ² / ₅	375 14" ³ / ₄ Reg +/- 10 ² / ₅ "	110/240	--
3372/50	3382/50	5	1125 44"	1465 58"	--	--	--
3373/40	3383/40	4	890 35"	1695 67"	--	--	--
3373.50C1	3383.50.CC1	5	1215 47" ¹ / ₂	2070 81" ¹ / ₂	365 14" ³ / ₅ Reg +/- 10 ² / ₅ "	180/400	960/2115
3373.50C01	3383.50T	5	1170 46"	2385 93" ⁹ / ₁₀	440 17" ¹ / ₃	170/375	1310/2885
3373/60	3383/60	6	1380 54"	1695 67"	--	--	--
3374/40	3384/40	4	1010 40"	1800 71"	--	--	--
3374/40 XL	3384/40 XL	4	1010 40"	2800 110"	--	--	--
3374/50	3384/50	5	1265 50"	1800 71"	--	--	--
3374/50 XL	3384/50 XL	5	1265 50"	2800 110"	--	--	--
3374/60C1	3384/60CC1	6	1520 60"	2235 88"	420 16" ¹ / ₂	175/385	1345/2965
3374L60C1	3384/60 XL	6	1520 60"	3230 127"	420 16" ¹ / ₂	240/530	1880/4145
3374/80C1	3384/80.CC1	8	2030 80"	2220 87" ² / ₅	420 16" ¹ / ₂ Reg +/- 10 ² / ₅ "	245/540	1565/3450
3375/50	3385/50	5	1535 60"	2080 82"	--	--	--
3375/50 XL	3385/50 XL	5	1535 60"	2880 114"	--	--	--
3375/60	3385/60	6	1845 73"	2080 82"	--	--	--
3375/60 XL	3385/60 XL	6	1845 73"	2880 114"	--	--	--
3375/70	3385/70	7	2155 85"	2080 82"	--	--	--
3375/70 XL	3385/70 XL	7	2155 85"	2880 114"	--	--	--
3376/40 XL	3386/40 XL	4	1580 62"	3390 133"	--	--	--

Pop out models are available in compact and lightweight version for all Transformers. Should you need any further information about system weight and dimensions, please contact Opacmare S.p.A. All pop-out models feature a static loading capacity of 150kg and a dynamic loading capacity of 70kg (cover only, no people lifting).

To match "POP-OUT" system with correct transformer platform please refer to the table in the following page. Standard width of flaps allows them to reach the edge of the Transformer.

"POP-OUT" SYSTEM IS AVAILABLE FOR ALL MODELS OF TRANSFORMER PLATFORM IN OUR CATALOGUE.

POP OUT RISE (H) CAN BE ADJUSTED OF +/-25MM.

LEAD TIME TO BE CONFIRMED

