


# TRANSFORMER® model 3382C

loading capacity 420 to 600 Kg

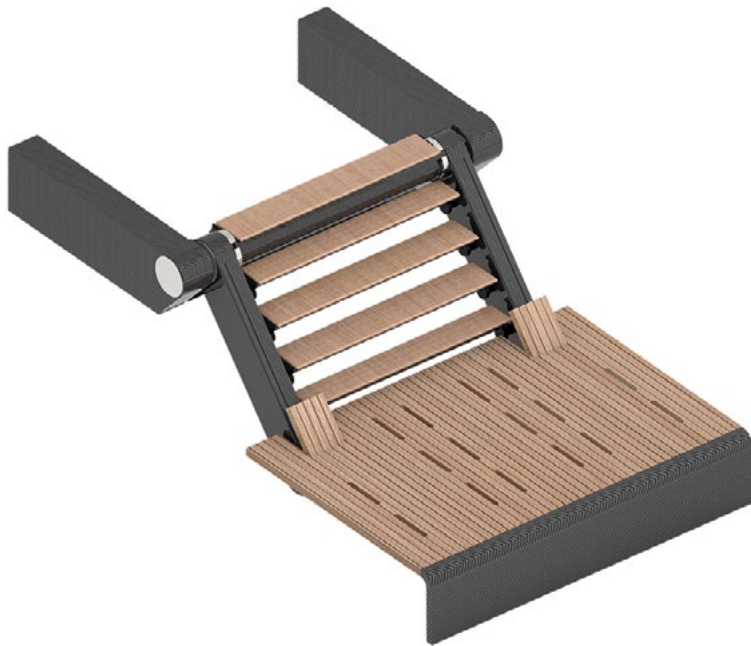

model	N° steps	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	F (mm/ inch)	G (mm/ inch)	H (mm/ inch)	X (mm/ inch)	Y (mm/ inch)	dynamic load (kg/lbs)	static load (kg/lbs)	weight (kg/lbs)
3382C50.0	5	3660 144"	1455 57"	1100 43"	1225 48"	1340 53"	1165 46"	1850 72 3/4"	250 9 5/8"	865 34"	1155 45 1/2"	420/950	750/1653	440/970
3382C40.0	4	2925 115"	1210 47"	850 33"	980 39"	1090 43"	1165 46"	1850 72 3/4"	250 9 5/8"	695 27"	920 36"	600/1320	900/1984	395/870

Transformers are available in compact and lightweight version with integrated Pop Out. Weight reduction ranges from 12% to 16% according to chosen model while system height is reduced of 18-25%.

Should you need any further information about system weight and dimensions, please contact Opacmare S.p.A.

## MULTIFUNCTIONAL PLATFORM.

The loading capacity includes the total platform weight (at shipyard's care), the full loaded tender or the jet ski.

The declared lifting capacity is assured if the load is positioned in the middle of measure C.

NEVER USE THE TRANSFORMER AS A SPRINGBOARD. DIVING MAY CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE TRANSFORMER AND ITS FASTENING ELEMENTS.

## PATENTED SYSTEM

