


# TENDER LIFT WITH INTEGRATED TRANSLATING PLATFORM

## SYSTEM 5220/26/28/31 loading capacity 300 to 600 Kg




| model      | A (mm/<br>inch) | A1 (mm/<br>inch) | B (mm/<br>inch) | C (mm/<br>inch) | F (mm/<br>inch) | f (mm/<br>inch) | L (mm/<br>inch) | M (mm/<br>inch) | $\alpha$ | R (mm/<br>inch) | S (mm/<br>inch) | capacity<br>standard<br>(kg/lbs) |
|------------|-----------------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------|-----------------|-----------------|----------------------------------|
| 5220/10.03 | 570<br>22" 3/8  | 605<br>23" 7/8   | 935<br>37"      | 710<br>28"      | 1055<br>41" 1/2 | 150<br>6"       | 710<br>28"      | 200<br>8"       | 11,5°    | 280<br>11"      | 228<br>9"       | 300/660                          |
| 5220/70.03 | 535<br>21"      | 535<br>21"       | 700<br>27" 1/2  | 715<br>28" 1/10 | 730<br>28" 3/8  | 580<br>22" 3/8  | 253<br>10"      | 148<br>5" 3/8   | 5°       | 280<br>11"      | 160<br>6" 1/8   | 300/660                          |
| 5220/70.02 | 535<br>21"      | 710<br>28"       | 1050<br>41" 3/8 | 655<br>28" 3/8  | 895<br>35" 1/4  | 565<br>22" 1/4  | 560<br>22"      | 305<br>12"      | 0°       | 280<br>11"      | 160<br>6" 1/8   | 350/770                          |
| 5226/85.02 | 520<br>20" 3/8  | 580<br>22" 3/8   | 815<br>32"      | 915<br>36"      | 1155<br>45"     | 420<br>16" 1/2  | 755<br>30"      | 225<br>8" 3/8   | -2°      | 333<br>13" 1/10 | 160<br>6" 1/8   | 400/880                          |
| 5220/10.19 | 519<br>20" 3/8  | 638<br>25" 1/10  | 925<br>36" 3/8  | 713<br>28"      | 1080<br>42" 1/2 | 114<br>4" 1/2   | 737<br>29"      | 210<br>8" 3/8   | 10°      | 280<br>11"      | 160<br>6" 1/8   | 500/1100                         |
| 5220/82.01 | 515<br>20" 1/8  | 515<br>20" 1/8   | 810<br>31" 3/8  | 735<br>29"      | 1040<br>41"     | 405<br>16"      | 530<br>20" 3/8  | 185<br>7" 1/8   | 9°       | 280<br>11"      | 160<br>6" 1/8   | 500/1100                         |
| 5220/10.17 | 566<br>22" 1/4  | 705<br>27" 3/4   | 785<br>30" 9/10 | 615<br>24" 1/8  | 710<br>28"      | 555<br>21" 9/10 | 272<br>10" 7/10 | 75<br>3"        | 8°       | 280<br>11"      | 160<br>6" 1/8   | 600/1350                         |
| 5220/11.05 | 763<br>30"      | 763<br>30"       | 1051<br>41" 3/8 | 715<br>28" 1/8  | 805<br>31" 7/10 | 138<br>5" 3/8   | 840<br>33" 1/8  | 290<br>11" 3/8  | 0°       | 280<br>11"      | 160<br>6" 1/8   | 600/1350                         |
| 5220/90.02 | 565<br>22" 1/8  | 670<br>26" 3/8   | 880<br>34" 3/8  | 600<br>23" 3/8  | 920<br>36" 1/8  | 370<br>14" 1/2  | 465<br>18" 3/8  | 190<br>7" 1/8   | 2,5°     | 280<br>11"      | 160<br>6" 1/8   | 600/1350                         |
| 5220/90.04 | 600<br>23" 3/8  | 670<br>26" 3/8   | 870<br>34" 1/4  | 600<br>23" 3/8  | 710<br>28"      | 420<br>16" 1/2  | 470<br>18" 3/4  | 180<br>7"       | 2,5°     | 280<br>11"      | 160<br>6" 1/8   | 600/1350                         |
| 5220/90.14 | 705<br>27" 3/4  | 711<br>28"       | 890<br>35"      | 625<br>24" 3/8  | 680<br>26" 3/8  | 98<br>3" 3/8    | 613<br>24" 1/10 | 123<br>4" 3/8   | 12°      | 280<br>11"      | 160<br>6" 1/8   | 600/1350                         |
| 5220S11.05 | 760<br>29" 9/10 | 760<br>29" 9/10  | 1050<br>41" 3/8 | 715<br>28" 1/10 | 1015<br>40"     | 145<br>5" 7/10  | 845<br>33" 1/4  | 285<br>11" 3/8  | -        | 280<br>11"      | 160<br>6" 1/8   | 600/1350                         |

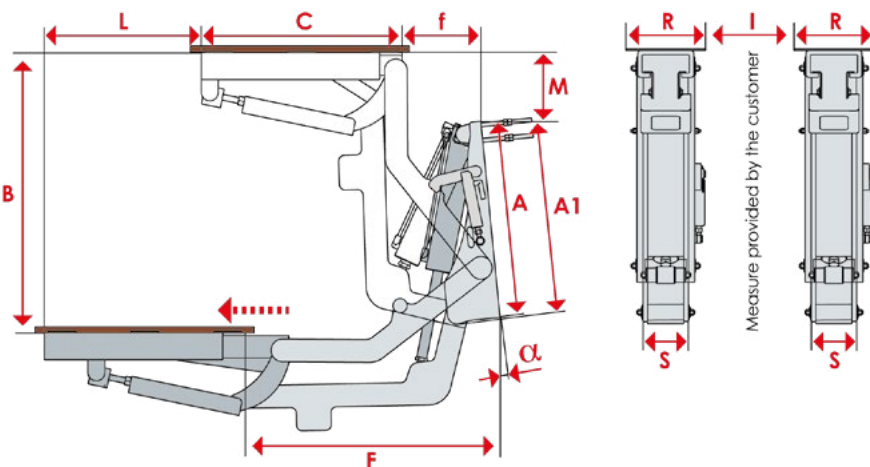


The declared lifting capacity is assured if the load is positioned in the middle of measure C.  
The loading capacity includes the total platform weight (at shipyard's care),  
the full loaded tender or the jet ski. Tender lift standard version is electro-polished only.

— LEAD TIME TO BE CONFIRMED

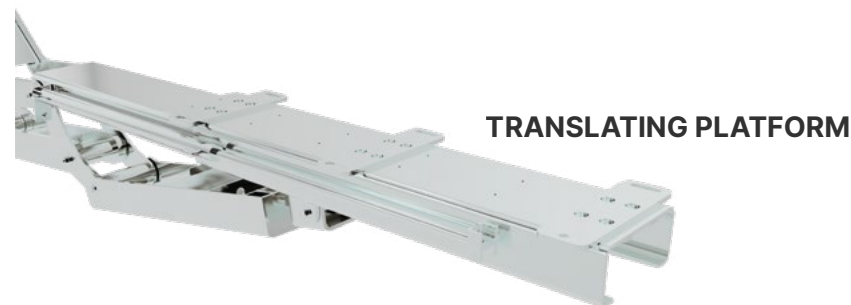

# TENDER LIFT WITH INTEGRATED TRANSLATING PLATFORM

## SYSTEM 5220/26/28/31 loading capacity 800 Kg

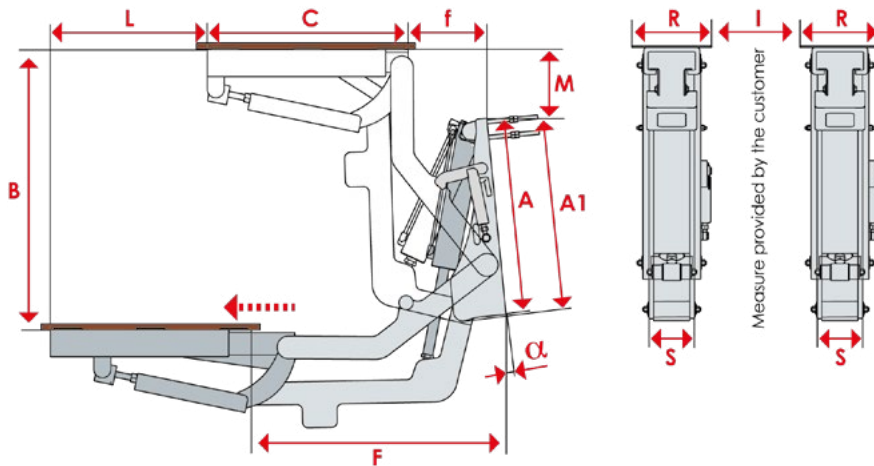


| model      | A (mm/<br>inch) | A1 (mm/<br>inch) | B (mm/<br>inch)  | C (mm/<br>inch) | F (mm/<br>inch)  | f (mm/<br>inch) | L (mm/<br>inch)  | M (mm/<br>inch) | $\alpha$ | R (mm/<br>inch) | S (mm/<br>inch) | capacity<br>standard<br>(kg/lbs) |
|------------|-----------------|------------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|----------|-----------------|-----------------|----------------------------------|
| 5220/10.01 | 695<br>27" 1/3  | 710<br>28"       | 990<br>39"       | 710<br>28"      | 900<br>35" 3/5   | 275<br>10" 4/5  | 555<br>21" 4/5   | 245<br>9" 3/5   | 2,5°     | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5220/10.02 | 700<br>27" 1/2  | 710<br>28"       | 990<br>39"       | 620<br>24" 3/5  | 831<br>32" 7/10  | 295<br>11" 3/5  | 535<br>21"       | 245<br>9" 3/5   | 0°       | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5220/10.04 | 710<br>28"      | 710<br>28"       | 975<br>38" 3/5   | 620<br>24" 3/5  | 730<br>28" 3/4   | 545<br>21" 3/8  | 380<br>15"       | 230<br>9"       | 2°       | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5220/10.05 | 695<br>27" 1/3  | 705<br>27" 3/4   | 975<br>38" 3/5   | 715<br>28" 1/5  | 935<br>37"       | 320<br>13"      | 630<br>24" 3/5   | 290<br>11" 3/5  | -1°      | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5220/10.06 | 650<br>25" 3/5  | 720<br>28" 1/5   | 965<br>38"       | 780<br>30" 3/5  | 935<br>37"       | 185<br>7" 1/5   | 718<br>28" 1/4   | 220<br>8" 3/5   | 3°       | 265<br>10" 3/5  | 228<br>9"       | 800/1800                         |
| 5220/10.08 | 710<br>28"      | 720<br>28" 1/5   | 965<br>38"       | 710<br>28"      | 640<br>25" 1/5   | 395<br>15" 1/2  | 445<br>17" 1/2   | 210<br>8" 1/5   | 2,5      | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5220/10.10 | 710<br>28"      | 710<br>28"       | 985<br>38" 4/5   | 620<br>24" 3/5  | 825<br>32" 4/5   | 300<br>12"      | 500<br>20"       | 220<br>8" 3/5   | 2,5      | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5220/10.15 | 710<br>28"      | 720<br>28" 1/5   | 1000<br>39" 1/5  | 655<br>25" 3/4  | 1060<br>41" 3/4  | 565<br>22" 1/5  | 495<br>19" 3/5   | 225<br>10"      | 0°       | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5220/11.04 | 650<br>25" 3/5  | 810<br>31" 4/5   | 1080<br>42" 3/5  | 650<br>25" 3/5  | 930<br>36" 3/5   | 565<br>22" 1/5  | 655<br>25" 3/4   | 240<br>9" 3/5   | 0°       | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5220/70.01 | 535<br>21"      | 535<br>21"       | 620<br>24" 3/5   | 735<br>29"      | 680<br>26" 4/5   | 440<br>17" 1/5  | 240<br>9" 3/5    | 80<br>3"        | 0°       | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5220/90.03 | 565<br>22" 1/5  | 670<br>26" 3/5   | 890<br>35"       | 600<br>23" 3/5  | 695<br>27" 1/5   | 475<br>18" 3/4  | 415<br>16" 3/5   | 200<br>8"       | 2°       | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5220/90.06 | 530<br>20" 4/5  | 540<br>21" 1/4   | 875<br>34" 3/4   | 625<br>24" 3/5  | 630<br>24" 4/5   | 330<br>13"      | 440<br>17" 1/5   | 325<br>12" 3/4  | 0°       | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5220/70.02 | 535<br>21"      | 535<br>21"       | 700<br>27" 1/2   | 715<br>28" 1/10 | 730<br>28" 4/5   | 595<br>23" 3/5  | 255<br>10"       | 580<br>22" 4/5  | 5°       | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5220M11.04 | 725<br>28" 1/2  | 725<br>28" 1/2   | 1090<br>42" 9/10 | 730<br>28" 3/4  | 800<br>31" 1/2   | 60<br>2" 3/5    | 715<br>28" 1/10  | 265<br>10" 3/5  | 2°       | 345<br>13" 3/5  | 160<br>6" 1/5   | 800/1800                         |
| 5220/10.21 | 708<br>27" 9/10 | 712<br>28"       | 1050<br>41" 1/5  | 655<br>28" 4/5  | 895<br>35" 1/4   | 565<br>22" 1/4  | 560<br>22"       | 305<br>12"      | 0°       | 280<br>11"      | 160<br>6" 1/5   | 800/1800                         |
| 5226/13.01 | 815<br>32"      | 822<br>32" 1/5   | 1230<br>48" 3/5  | 1310<br>51" 1/2 | 1835<br>72" 1/4  | 559<br>22"      | 1235<br>48" 3/5  | 435<br>17" 1/10 | 2°       | 373<br>14" 3/5  | 229<br>9"       | 800/1800                         |
| 5226/53.02 | 505<br>19" 9/10 | 567<br>22" 1/5   | 505<br>19" 9/10  | 823<br>32" 3/5  | 819<br>32" 1/4   | 272<br>10" 7/10 | 547<br>21" 1/2   | 97<br>3" 4/5    | 0°       | 333<br>13" 1/10 | 160<br>6" 1/5   | 800/1800                         |
| 5231/11.01 | 450<br>17" 7/10 | 450<br>17" 7/10  | 1150<br>45" 1/4  | 555<br>21" 4/5  | 1140<br>44" 9/10 | 1285<br>50" 3/5 | -150<br>-5" 9/10 | 315<br>12" 3/5  | 11°      | 169<br>6" 3/5   | 166<br>6" 1/2   | 800/1800                         |

The declared lifting capacity is assured if the load is positioned in the middle of measure C. The loading capacity includes the total platform weight (at shipyard's care), the full loaded tender or the jet ski. Tender lift standard version is electro-polished only.

LEAD TIME TO BE CONFIRMED

# TENDER LIFT WITH INTEGRATED TRANSLATING PLATFORM SYSTEM 5220/26/28/31 loading capacity 900 to 1500 Kg

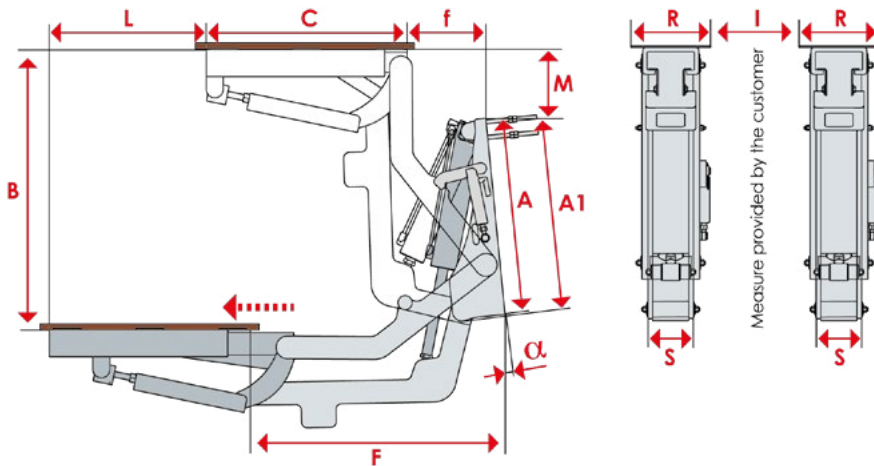

| model        | A (mm/<br>inch) | A1 (mm/<br>inch) | B (mm/<br>inch)  | C (mm/<br>inch)  | F (mm/<br>inch) | f (mm/<br>inch) | L (mm/<br>inch) | M (mm/<br>inch) | $\alpha$ | R (mm/<br>inch) | S (mm/<br>inch) | capacity<br>standard<br>(kg/lbs) |
|--------------|-----------------|------------------|------------------|------------------|-----------------|-----------------|-----------------|-----------------|----------|-----------------|-----------------|----------------------------------|
| 5220/90.10   | 700<br>27" 1/2  | 710<br>28"       | 900<br>35" 3/8   | 780<br>30" 7/16  | 976<br>38" 3/8  | 462<br>18" 1/8  | 514<br>20" 1/4  | 274<br>10" 3/4  | 0°       | 302<br>11" 9/16 | 160<br>6" 1/8   | 900/1985                         |
| - 5220/10.14 | 850<br>33" 1/2  | 850<br>33" 1/2   | 1020<br>38" 3/4  | 650<br>25" 3/8   | 1170<br>32" 3/8 | 510<br>11" 4/8  | 620<br>24" 3/8  | 225<br>9"       | 2,5°     | 265<br>10" 3/8  | 160<br>6" 1/8   | 1000/2200                        |
| 5220/10.16   | 670<br>26" 3/8  | 670<br>26" 3/8   | 1000<br>39" 1/8  | 625<br>24" 3/8   | 635<br>25"      | 370<br>14" 1/2  | 425<br>16" 3/4  | 290<br>11" 3/8  | 2°       | 280<br>11"      | 160<br>6" 1/8   | 1000/2200                        |
| 5220/10.18   | 700<br>27" 1/2  | 710<br>28"       | 970<br>38" 3/8   | 625<br>24" 3/8   | 953<br>37" 1/2  | 544<br>21" 3/8  | 399<br>15" 7/16 | 245<br>9" 3/8   | 0,5°     | 280<br>11"      | 160<br>6" 1/8   | 1000/2200                        |
| - 5220/11.01 | 785<br>31"      | 795<br>31" 1/8   | 1105<br>43" 1/2  | 780<br>30" 3/8   | 1000<br>39" 1/8 | 520<br>20" 1/2  | 480<br>19"      | 160<br>6" 1/8   | 0°       | 280<br>11"      | 160<br>6" 1/8   | 1000/2200                        |
| 5220/11.02   | 795<br>31" 1/8  | 795<br>31" 1/8   | 1070<br>42"      | 605<br>23" 4/8   | 820<br>32" 1/4  | 525<br>20" 3/8  | 480<br>19"      | 215<br>8" 3/8   | 2°       | 280<br>11"      | 160<br>6" 1/8   | 1000/2200                        |
| 5220M11.08   | 654<br>25" 3/4  | 818<br>32" 1/8   | 1080<br>42" 1/2  | 1085<br>42" 7/16 | 727<br>28" 3/8  | 134<br>5" 1/4   | 593<br>23" 3/8  | 253<br>10"      | 0°       | 378<br>14" 9/16 | 291<br>11" 1/2  | 1000/2200                        |
| - 5220/12.01 | 795<br>31" 1/8  | 795<br>31" 1/8   | 1070<br>42"      | 605<br>23" 4/8   | 820<br>32" 1/4  | 525<br>20" 3/8  | 480<br>19"      | 215<br>8" 3/8   | 2°       | 280<br>11"      | 160<br>6" 1/8   | 1000/2200                        |
| - 5220/12.02 | 795<br>31" 1/8  | 795<br>31" 1/8   | 1240<br>48" 4/8  | 780<br>30" 3/8   | 750<br>29" 1/2  | 520<br>20" 1/2  | 425<br>16" 3/4  | 250<br>9" 4/8   | 10°      | 265<br>10" 3/8  | 160<br>6" 1/8   | 1000/2200                        |
| 5231/13.02   | 415<br>16" 3/8  | 415<br>16" 3/8   | 1265<br>49" 4/8  | 715<br>26" 1/8   | 1000<br>39" 1/8 | 590<br>23" 1/8  | 410<br>16" 1/2  | 630<br>24" 3/8  | 0°       | 280<br>11"      | 160<br>6" 1/8   | 1000/2200                        |
| - 5220/11.03 | 810<br>31" 4/8  | 810<br>31" 4/8   | 1090<br>42" 4/8  | 650<br>25" 3/8   | 880<br>34" 3/8  | 510<br>11" 4/8  | 610<br>24"      | 220<br>8" 3/8   | 2,5°     | 280<br>11"      | 160<br>6" 1/8   | 1200/2640                        |
| 5220M12.05   | 765<br>30" 1/16 | 765<br>30" 1/16  | 1150<br>45" 1/4  | 1280<br>50" 3/8  | 760<br>29" 9/16 | 250<br>9" 4/8   | 485<br>19"      | 275<br>10" 3/4  | 2°       | 345<br>13" 3/8  | 160<br>6" 1/8   | 1200/2640                        |
| 5228/12.03   | 830<br>32" 3/8  | 835<br>32" 9/16  | 1115<br>43" 9/16 | 810<br>31" 9/16  | 865<br>34"      | 485<br>19"      | 300<br>11" 4/8  | 135<br>5" 1/8   | 4,5°     | 355<br>14"      | 230<br>9"       | 1300/2860                        |
| 5228/12.01   | 810<br>31" 9/16 | 835<br>32" 9/16  | 1190<br>46" 4/8  | 810<br>31" 9/16  | 1050<br>41" 1/8 | 840<br>33"      | 410<br>16" 1/8  | 280<br>11"      | 0°       | 355<br>14"      | 230<br>9"       | 1500/3300                        |
| 5228/12.02   | 830<br>32" 3/8  | 835<br>32" 9/16  | 1140<br>44" 9/16 | 810<br>31" 9/16  | 985<br>37" 7/16 | 485<br>19"      | 505<br>19" 9/16 | 240<br>9" 3/8   | 0°       | 355<br>14"      | 230<br>9"       | 1500/3300                        |

The declared lifting capacity is assured if the load is positioned in the middle of measure C.  
The loading capacity includes the total platform weight (at shipyard's care),  
the full loaded tender or the jet ski. Tender lift standard version is electro-polished only.

- LEAD TIME TO BE CONFIRMED



TRANSLATING PLATFORM