

TENDER LIFT 5232


loading capacity 600 Kg to 1300 Kg





model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	F (mm/ inch)	f (mm/ inch)	L (mm/ inch)	M (mm/ inch)	R (mm/ inch)	R1 (mm/ inch)	S (mm/ inch)	S1 (mm/ inch)	α	capacity standard (kg/lbs)
5232M10.01	675 26" 1/2	979 38" 1/2	1005 39" 3/8	569 22" 3/8	232 9" 1/10	373 14" 7/10	343 13" 1/2	350 13" 3/4	281 11"	200 7" 9/10	312 12" 1/4	2°	600/1320
5232M12.01	690 27" 3/8	1140 44" 9/10	916 36" 1/8	676 26" 5/8	1	636 25"	343 13" 1/2	390 15" 1/3	281 11"	200 7" 9/10	351 13" 7/8	2°	800/1800
5232/13.05	805 31" 7/10	1245 49"	815 32"	970 38" 1/8	275 10" 3/8	700 27" 1/2	225 8" 9/16	585 23"	550 21" 3/8	550 21" 3/8	585 23"	0°	1300/2860

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	F (mm/ inch)	f (mm/ inch)	L (mm/ inch)	M (mm/ inch)	R (mm/ inch)	S (mm/ inch)	S1 (mm/ inch)	α	capacity standard (kg/lbs)
5232/13.01	450 17" 7/10	1230 48" 3/8	1007 39" 3/8	706 27" 1/8	91 3" 1/2	719 28" 3/10	651 25" 3/8	1465 57" 7/10	356 14"	1295 51"	1.5°	1000/2200
5232/13.03	450 17" 7/10	1230 48" 3/8	1030 40" 1/2	706 27" 1/8	--	719 28" 3/10	651 25" 3/8	1465 57" 3/8	356 14"	1295 51"	1.5°	1000/2200

Hydraulic lifting mechanism for stern platforms that allow and ease tenders and jet skis hauling. Fully made of AISI 316L electropolished stainless steel and fitted with two arms. Locking safety system managed by hydraulic rams. The declared lifting capacity is assured if the load is positioned in the middle of dimension C. The loading capacity includes the total platform weight (at shipyard care), the full loaded tender or the jet ski.

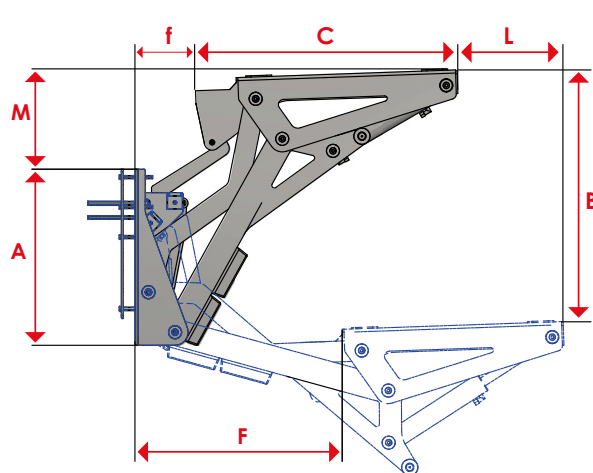

Model 5232M10-5232M12-5232/13.05

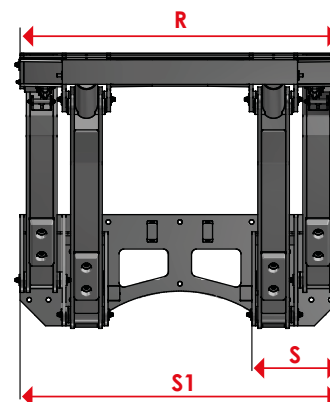

Model 5232/13.01-5232/13.03

