




# S.A.F.E. model 5270/71

## loading capacity 150 to 300 Kg

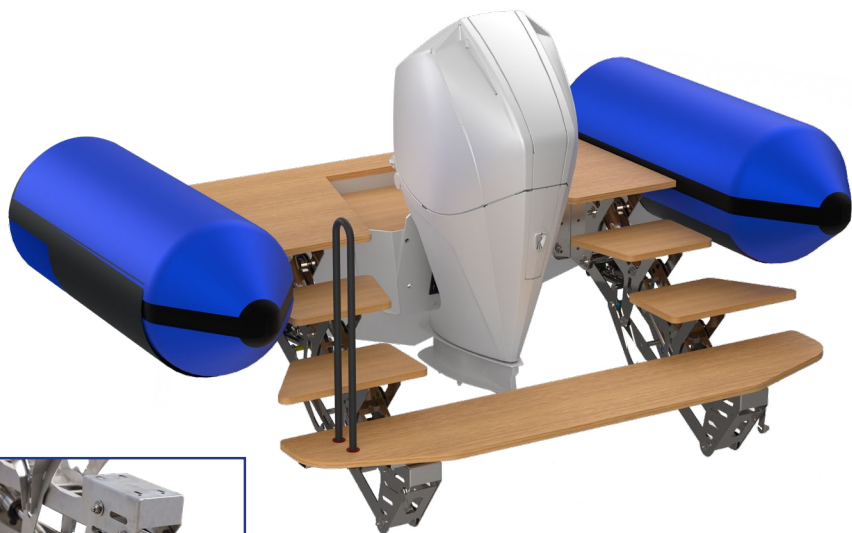

ADDITIONAL STEP OPTIONAL

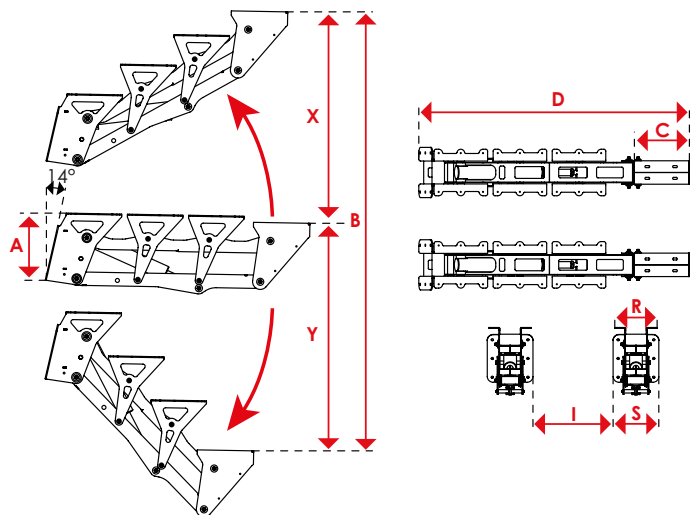

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	R (mm/ inch)	S (mm/ inch)	X (mm/ inch)	Y (mm/ inch)	dynamic load (kg/lbs)	static load (kg/lbs)	weight (kg/lbs)
5270/96	350 13" 4/5	960 38"	285 11" 1/5	1395 55"	250 9" 4/5	272 10" 3/4	480 19"	480 19"	150/330	300/660	60/132
5270/11	350 13" 4/5	1160 45" 3/5	285 11" 1/5	1395 55"	250 9" 4/5	272 10" 3/4	480 19"	680 26" 3/4	150/330	300/660	83/183
5270/16	370 14" 1/2	1635 64" 2/5	285 11" 1/5	1835 72" 1/4	250 9" 4/5	272 10" 3/4	810 32"	825 32" 1/2	150/330	300/660	115/253
5271/11	355 14"	1160 45" 2/3	550 20"	1640 64" 1/2	250 9" 4/5	272 10" 3/4	480 19"	680 26" 3/4	300/660	450/992	115/253
5271/16	370 14" 1/2	1635 64" 2/5	295 11" 3/5	1760 69" 2/5	255 10"	487 19" 1/5	810 31" 9/10	825 32" 1/2	300/660	450/992	130/286

POSSIBLE CUSTOMIZATION OF DIMENSIONS

Transom system with UP&DOWN pantograph movement and extendable/retractable steps. When the platform is lowered, the steps offer to the user a comfortable and safe access to water and easy on boarding from the sea just as if he were in his own swimming pool.

The possibility to rise the S.A.F.E. system and lift the steps, makes it easy, safe, and comfortable to get on board from the dock.

At the same time, this allows the outboard motors rise and the positioning of propellers out of the water during the mooring.

This product includes 2 safety hooks that engage when the platform is fully lifted up.

S.A.F.E. system 5270 can be fitted on any type of boat, both as refit and first installation, allowing you to enjoy an increased walkway surface on your boat.

Customizations can be made according to your boat design.

### OPTIONAL

- Up/down signal to pilot house
  - Manual stanchions
  - Basic management electronics
  - Managing solenoid valve with SMART technology
  - Additional step
- During navigation, the product must be kept in high position.

