


# TRANSFORMER® WITH SLIDE

loading capacity 420 to 600 Kg

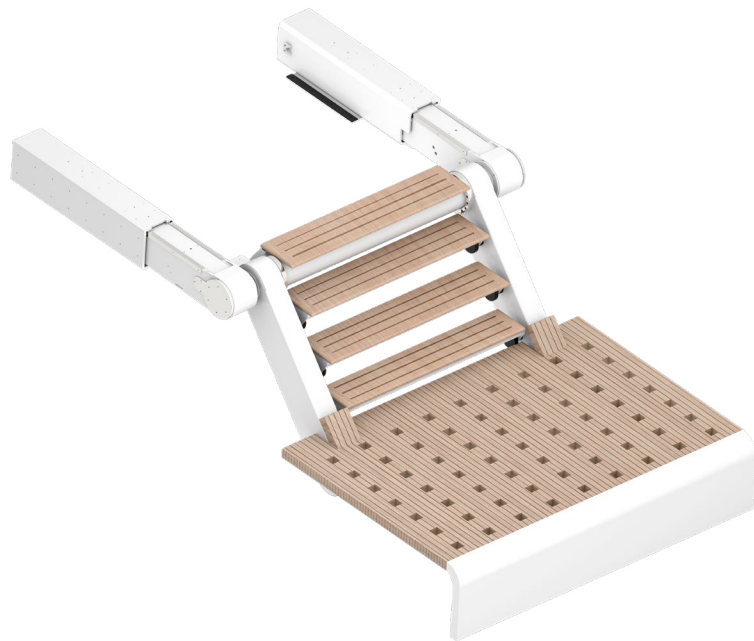

model	N° steps	A (mm/ inch)	B (mm/ inch)	B1 (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	F (mm/ inch)	G (mm/ inch)	H (mm/ inch)	S (mm/ inch)	X (mm/ inch)	Y (mm/ inch)	dynamic load (kg/lbs)	static load (kg/lbs)	weight (kg/lbs)
3382S50	5	3560 140"	1470 58"	1860 73"	1100 43"	1225 48"	1740 68"	1165 46"	1860 73"	250 9" 5/8"	390 15"	865 34"	1160 46"	420/950	750/1653	860/1895
3382S40	4	3310 130"	1225 48"	1615 63"	850 33"	980 39"	1495 59"	1165 46"	1860 73"	250 9" 5/8"	390 15"	695 27"	920 36"	600/1320	900/1984	790/1740



## MULTIFUNCTIONAL PLATFORM.

The loading capacity includes the total platform weight (at shipyard's care), the full loaded tender or the jet ski.

The declared lifting capacity is assured if the load is positioned in the middle of measure C.

## PATENTED SYSTEM

NEVER USE THE TRANSFORMER AS A SPRINGBOARD. DIVING MAY CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE TRANSFORMER AND ITS FASTENING ELEMENTS.

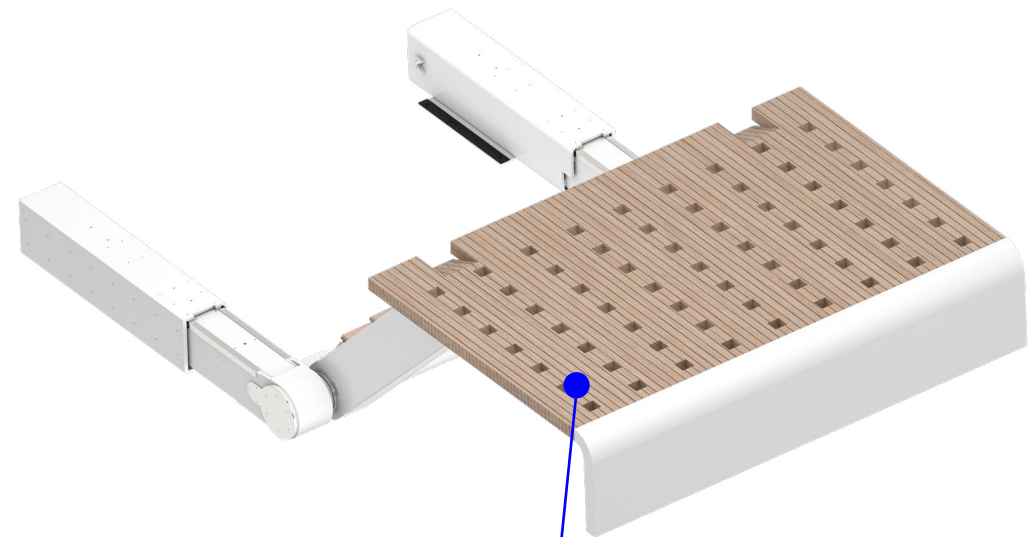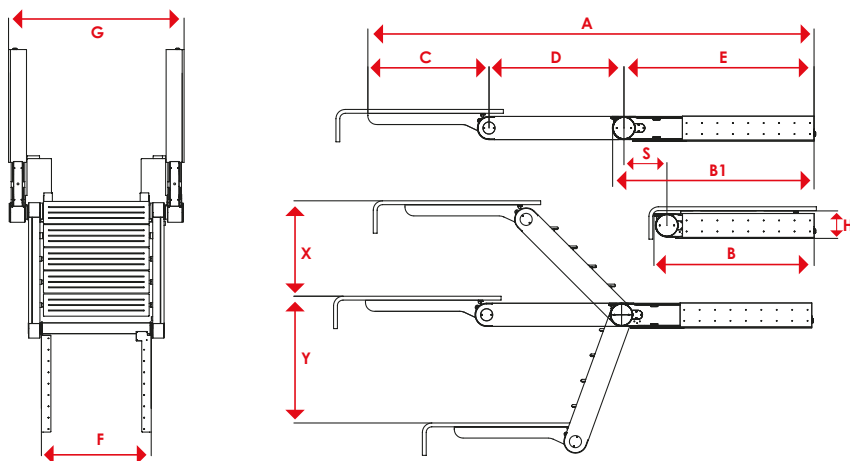

Drainage holes must be mandatorily drilled on the platform (at shipyard care).