MULTIFUNCTION GANGWAYS 3626

extension 1450 mm to 2590 mm, H box: 230 mm

OPACMARE

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	G (mm/ inch)	L (mm/ inch)	H (mm/ inch)	α	β	n° steps
3626/15	1450 57”	1950 76”¾	230 9”	680 26”¾	1120 44”	470 18”½	590 23”⅕	230 9”	35°	70°	6
3626S20	1825 71”⁹⁄₁₀	2400 94”½	275 10”⅘	830 32”⅜	1365 53”¾	470 18”½	660 26”	230 9”	35°	70°	7
3626/20	1850 72”⅘	2340 92”¹⁄₁₀	340 13”⅖	830 32”⅜	1365 53”¾	470 18”½	590 23”⅕	230 9”	35°	70°	7
3626/21	2100 82”⁷⁄₁₀	2590 102”	340 13”⅖	975 38”⅖	1600 63”	470 18”½	590 23”⅕	230 9”	35°	70°	8
3626/31	2590 102”	3125 123”	340 13”⅖	1260 49”⅜	2070 81”½	470 18”½	590 23”⅕	230 9”	35°	70°	10

Optional box: weathertight, watertight and certificated watertight.

Models 3626 are available upon request with optional tilting angles +50° (α) and -50°(β).

This gangway allows the boarding of 120 Kg / 264,5 lbs maximum (one person at a time).
Tolerance for swing angles is +/- 1 degree.

NEVER USE THE GANGWAY AS SPRINGBOARD. DIVING COULD CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE GANGWAY AND ITS FASTENING ELEMENTS.
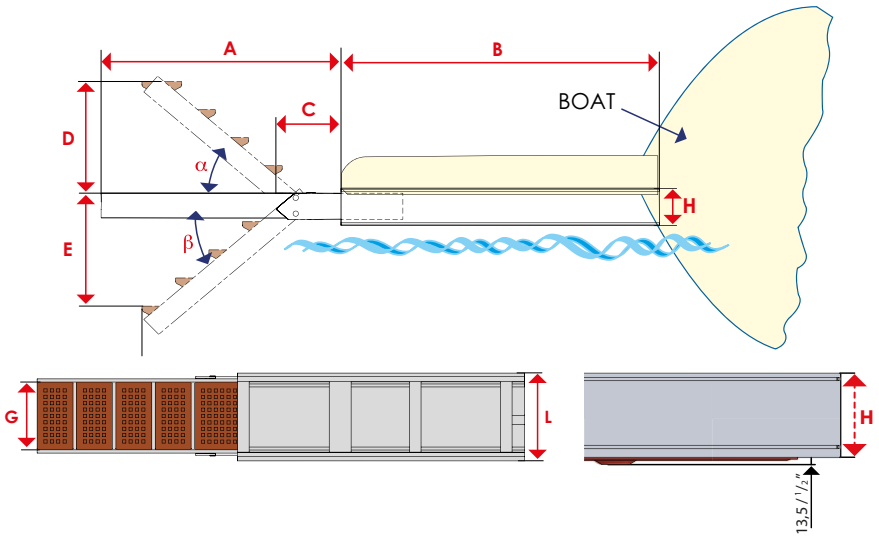
- LEAD TIME TO BE CONFIRMED