



# Four wings door 2060

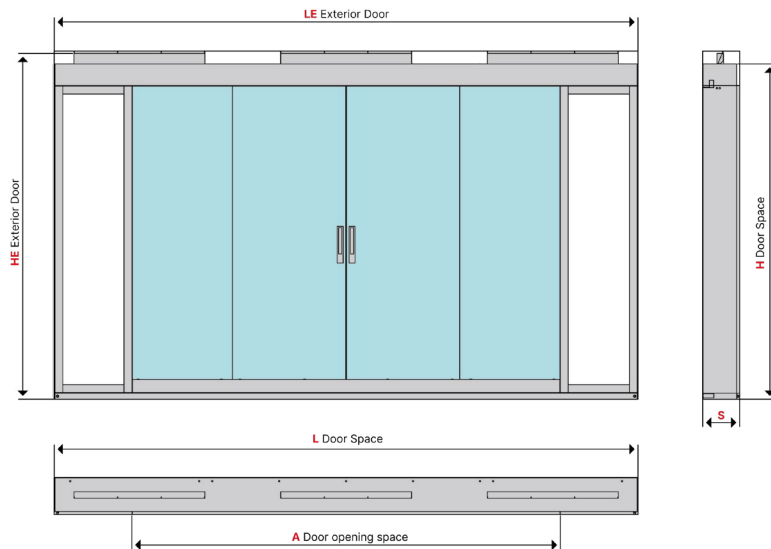

| model   | A (mm/inch)                               | L (mm/inch)                               | Le (mm/inch) | H (mm/inch)                               | He (mm/inch)                               | S (mm/inch)                             | glass (mm/inch) | handle standard | weather proof ISO 12216:2023 |
|---------|---|---|--------------|---|--|---|-----------------|-----------------|------------------------------|
| 2060/05 | 2485<br>97 <sup>1</sup> / <sub>8</sub> "  | 4455<br>175 <sup>1</sup> / <sub>2</sub> " | --           | 2560<br>100 <sup>3</sup> / <sub>4</sub> " | 2640<br>103 <sup>9</sup> / <sub>10</sub> " | 280<br>11"                              | 15,5 3/8"       | mod.7550        | CAT 3                        |
| 2060/06 | 3690<br>145 <sup>1</sup> / <sub>4</sub> " | 5965<br>234 <sup>4</sup> / <sub>8</sub> " | --           | 2340<br>92 <sup>1</sup> / <sub>10</sub> " | --   | 155<br>6 <sup>1</sup> / <sub>10</sub> " | 11.5 1/2"       | mod.7550        | CAT 3                        |

Four central sliding wings with opposite opening.  
The doors are subject to quality control tests to comply with ISO 12216.2023 standards.

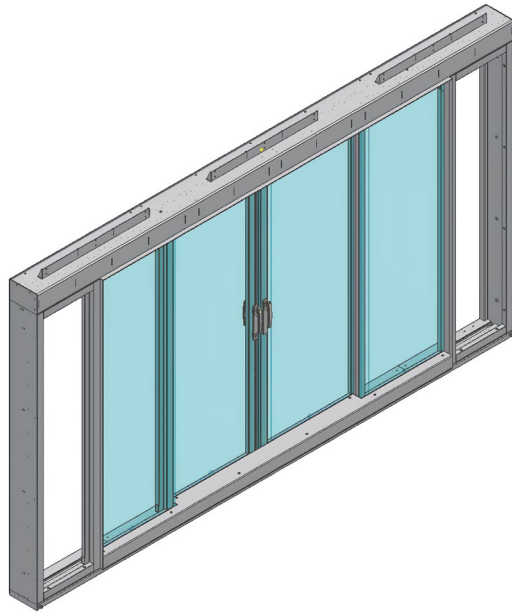