


Four wings door 2067.10/14/15



model	A (mm/inch)	B (mm/inch)	C (mm/inch)	D (mm/inch)	L (mm/inch)	H (mm/inch)	S (mm/inch)	glass (mm/inch)	handle standard	weather proof ISO 12216:2023
2067/10	855 33 ² / ₃ "	1705 67 ¹ / ₁₀ "	2675 105 ³ / ₁₀ "	3490 137 ² / ₅ "	3800 149 ³ / ₅ "	2060 81 ¹ / ₁₀ "	150 5 ⁹ / ₁₀ "	17,5 7/10"	mod.7550	CAT 3
2067/14	660 26"	1320 52"	2120 83 ¹ / ₂ "	2740 27 ⁹ / ₁₀ "	3060 120 ¹ / ₂ "	2075 81 ¹ / ₁₀ "	160 6 ³ / ₁₀ "	12 1/2"	mod.7550	CAT 3
2067/15	660 26"	1320 52"	2120 83 ¹ / ₂ "	2740 27 ⁹ / ₁₀ "	3200 126"	2075 81 ¹ / ₁₀ "	160 6 ³ / ₁₀ "	12 1/2"	mod.7550	CAT 3

Four-wing door, two of which are central and sliding outwards
 To totally open the door, it is necessary to activate the side wings mechanism and switch from sliding to hinge outwards opening and slide the rights sliding wing rightwards and the left sliding wing leftwards.
 The two central wings must make a double movement, sliding sideways first, then rotating and folding on the external wings.
 The doors are subject to quality control tests to comply with ISO 12216.2023 standards.
 The sliding doors opening direction is always considered from the outside of the boat.

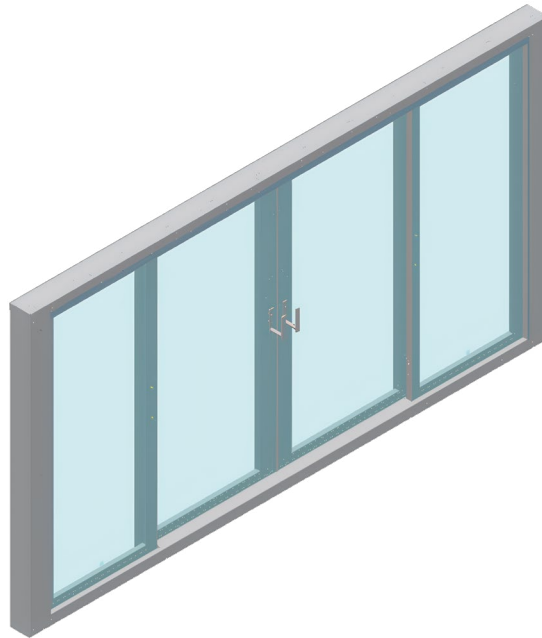