


Four wings door 2088

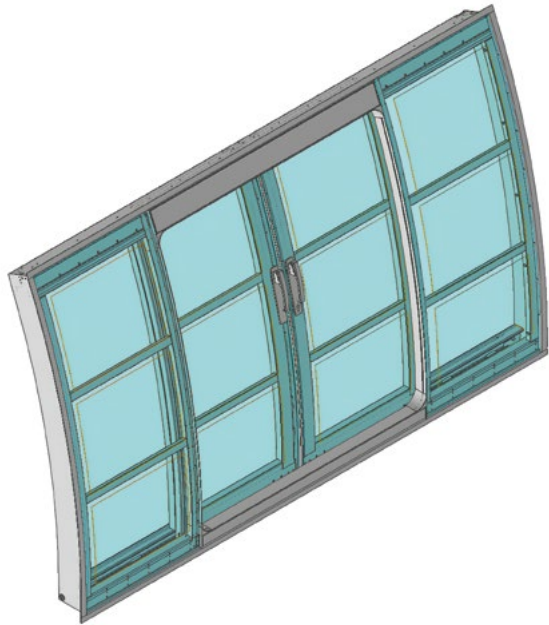

| model | A (mm/ inch) | L (mm/ inch) | Le (mm/ inch) | H (mm/ inch) | He (mm/ inch) | R (mm/ inch) | Re (mm/ inch) | S (mm/ inch) | glass (mm/inch) | handle standard | weather proof ISO 12216:2023 |
|---------|--|---|--|---|---|--|--|---------------------------------------|-----------------------------------|--------------------|---------------------------------|
| 2088/10 | 1195 47 ¹¹ / ₁₆ | 2850 112 ¹¹ / ₁₆ | 2910 114 ³ / ₁₆ | 1660 65 ³ / ₁₆ | 1720 67 ⁴ / ₁₆ | 3830 150 ⁴ / ₁₆ | 4005 157 ³ / ₁₆ | 170 6 ⁴ / ₁₆ | 11 ³ / ₁₆ " | mod. 7550 | CAT 2 |

Bowed manual door with four wings, made of mirror polished AISI 316L stainless steel. Two fixed side wings and two central wings with opposite opening direction and internal sliding, behind the fixed side wings.

Weathertightness granted by the INFLATABLE GASKET. Pneumatic system composed of valves, hoses, pneumatic gasket, and compressor.

The doors are subject to quality control tests to comply ISO 12216.2023 standards.

