


# ALUMINIUM TELESCOPIC GANGWAY 3773 Dolphin

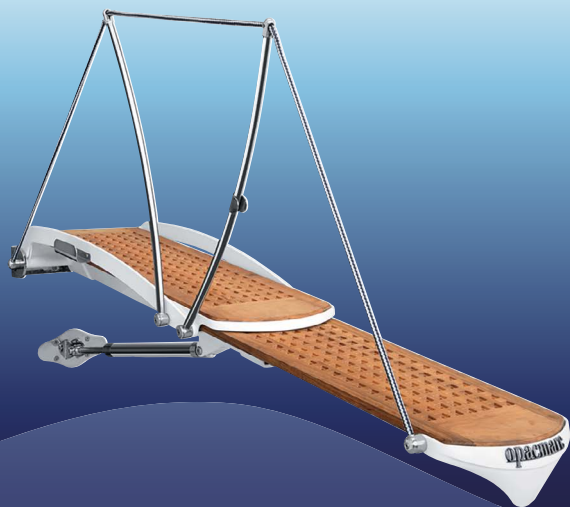

model	X (mm/inch)	Y (mm/inch)	K (mm/inch)	$\alpha$	$\beta$	loading standard (kg/lbs)	weight (kg/lbs)
3773/19	1920 75" 3/5	1200 47" 1/4	300 12"	45°	40°	200/400	62/140
3773/23	2310 91"	1410 55" 1/2	300 12"	45°	40°	170/380	70/155
3773/26	2650 104" 1/3	1620 63" 3/4	300 12"	45°	40°	150/330	83/185

This gangway allows the boarding of 120 Kg/270 lbs maximum (one person at a time).  
IDEAL FOR TENDER LIFTING.

X= maximum length of gangway when extended

K= the minimum distance to be maintained between the centre of rotation of the gangway and the centre of rotation of the ram (K).

$\alpha$  and  $\beta$ = the total angle the gangway can achieve.

The drawings have been studied considering a vertical transom. Variations of the transom angle and the different heights of dimension K will produce different values of angle  $\alpha$  and  $\beta$ .

NEVER USE THE GANGWAY AS SPRINGBOARD. DIVING COULD CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE GANGWAY AND ITS FASTENING ELEMENTS.

