


ALUMINIUM ROTATING GANGWAYS 3453/3893/93S

DOLPHIN TWISTER extension 1560 mm to 3390 mm

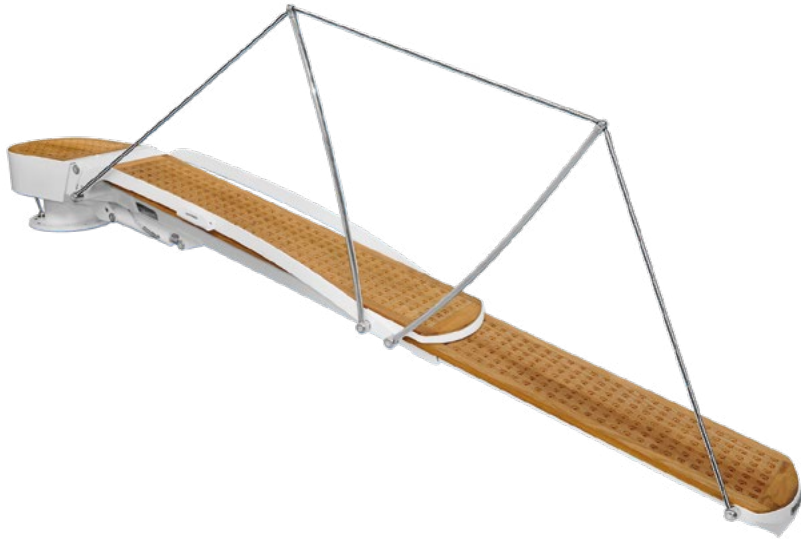

model	N. elements	X (mm/ inch)	Y (mm/ inch)	C (mm/ inch)	E (mm/ inch)	F (mm/ inch)	G (mm/ inch)	α	β	rotation standard	rotation optional	lifting standard (kg/lbs)	weight (kg/lbs)
3453/15	1	1560 61"	--	190 7 1/2"	247 9 3/4"	360 14 1/5"	\varnothing 350 13 3/4"	25°	-	180°	--	--	74/160
- 3453/20	1	2010 79"	--	190 7 1/2"	247 9 3/4"	360 14 1/5"	\varnothing 350 13 3/4"	25°	-	180°	--	--	81/180
3453/24	1	2405 95"	--	190 7 1/2"	247 9 3/4"	360 14 1/5"	\varnothing 350 13 3/4"	25°	-	180°	--	--	88/195
- 3893/28	2	2840 111 4/5"	1940 76 1/5"	205 8 1/8"	225 8 11/13"	360 14 1/5"	\varnothing 300 11 4/5"	20°	20°	180°	359°	--	119/262
- 3893/30	2	3030 119 3/10"	2000 78 3/4"	205 8 1/8"	225 8 11/13"	360 14 1/5"	\varnothing 300 11 4/5"	20°	20°	180°	359°	--	123/271
- 3893/33	2	3390 133 1/2"	2190 86 1/5"	205 8 1/8"	225 8 11/13"	360 14 1/5"	\varnothing 300 11 4/5"	20°	20°	180°	359°	--	128/282
3893S/28	2	2840 111 4/5"	1940 76 1/5"	205 8 1/8"	225 8 11/13"	360 14 1/5"	\varnothing 300 11 4/5"	40°	22°	180°	359°	250/550	128/282
- 3893S/30	2	3030 119 3/10"	2000 78 3/4"	205 8 1/8"	225 8 11/13"	360 14 1/5"	\varnothing 300 11 4/5"	40°	22°	180°	359°	200/440	135/298
- 3893S/33	2	3390 133 1/2"	2190 86 1/5"	205 8 1/8"	225 8 11/13"	360 14 1/5"	\varnothing 300 11 4/5"	40°	22°	180°	359°	150/330	142/313

This gangway allows passengers boarding only, up to 120kg / 270lbs (one person at a time). No tender lifting allowed.

X= maximum length of gangway when extended

Y= minimum length of gangway when retracted

C= rotational range of the base unit

E= height of the rotating base

α and β = the total angle the gangway can achieve

NEVER USE THE GANGWAY AS SPRINGBOARD. DIVING COULD CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE GANGWAY AND ITS FASTENING ELEMENTS.

- LEAD TIME TO BE CONFIRMED

