



LINEAR CEILING CRANES model 3130/31/32/33


loading capacity 500 Kg to 2000 Kg

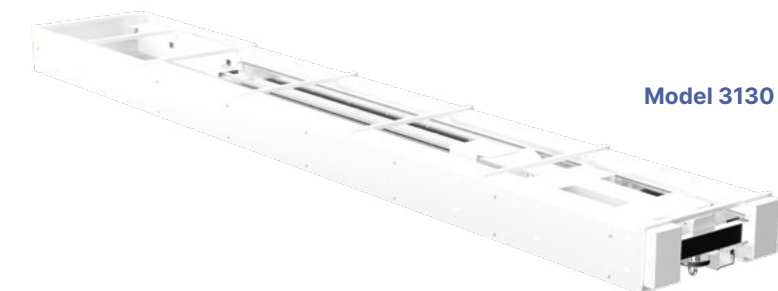

Model 3130

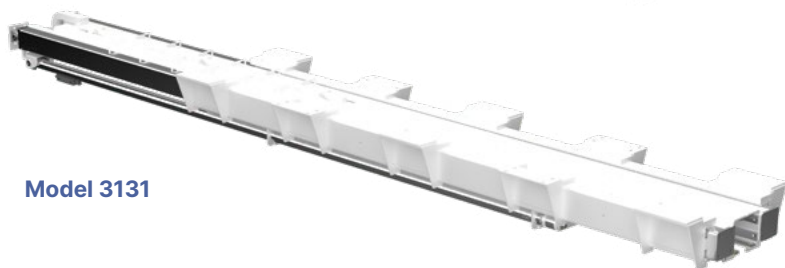

Model 3131

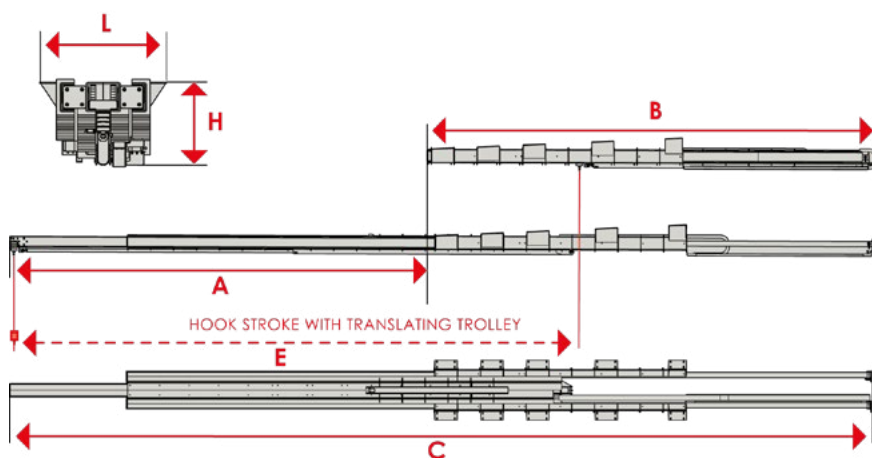

model	A (mm/inch)	B (mm/inch)	C (mm/inch)	E (mm/inch)	H (mm/inch)	L (mm/inch)	Cable lenght (mm/inch)	Capacity standard (kg/lbs)	Weight (kg/lbs)
3130/76	3350 131 ⁹ / ₁₀	4700 185"	8050 317"	5780 227 ¹ / ₂	250 9 ⁴ / ₁₆	690 27"	1800 70"	500/1100	1220/2700
3131/50	3215 126 ³ / ₁₆	4980 196"	8210 323 ¹ / ₁₆	6135 241 ¹ / ₂	455 17 ⁹ / ₁₆	730 28 ³ / ₄	1600 63"	500/1100	1370/3020
3131/21	1569 61 ³ / ₄	1845 72 ¹ / ₂	3414 134 ¹ / ₂	2050 80 ¹ / ₂	310 12"	690 27"	1500 59"	600/1323	410/904
3131/45	2845 112"	3320 130 ⁷ / ₁₀	6155 242 ¹ / ₁₆	4500 177 ⁷ / ₁₆	310 12"	690 27"	1500 59"	600/1323	680/1500
3131/72	4840 190 ¹ / ₂	5140 202"	9980 393"	6550 258"	310 12"	690 27"	2000 78 ³ / ₄	600/1323	914/2015
3131/70	4840 190 ¹ / ₂	5140 202"	9980 393"	6550 258"	310 12"	690 27"	1500 59"	700/1550	985/2172
3131/57	3800 149 ³ / ₁₆	4980 196"	8780 345 ³ / ₁₆	5630 221 ³ / ₁₆	455 17 ⁹ / ₁₆	730 28 ³ / ₄	1500 59"	1100/2425	1400/3080
3131/52	3404 134"	4500 177 ⁷ / ₁₆	7790 306 ⁷ / ₁₆	5365 211 ¹ / ₁₆	310 12"	690 27"	1500 59"	1200/2645	1150/2535
3132/80	5590 220"	6000 236"	12405 488"	8500 335"	440 17"	1010 40"	2100 82 ³ / ₄	1500/3300	2750/6060
3131/60	1655 65 ¹ / ₁₆	7580 298 ² / ₁₆	9230 363 ³ / ₁₆	4790 188 ³ / ₁₆	365 14 ² / ₁₆	790 31 ¹ / ₁₆	2200 86 ³ / ₁₆	1500/3300	1600/3525
3131/66	3830 150 ³ / ₄	5540 218 ¹ / ₁₆	10105 397 ¹ / ₁₆	6500 255 ¹ / ₁₆	350 13 ³ / ₄	1240 48 ¹ / ₁₆	1600 63"	2000/4410	1530/3370
3133/66	3400 133"	5465 215"	8865 349"	6550 258"	499 18"	720 28"	2400 94 ¹ / ₂	2000/4410	2000/4410

Ceiling crane made of AISI 316L stainless steel, painted white with fixed structure for ceiling fastening.
Mobile structure made of polished AISI 316L stainless steel.
Possibility of product certification.

LEAD TIME TO BE CONFIRMED



Model 3132

Model 3133